


MPA12065.0 (12V65Ah)

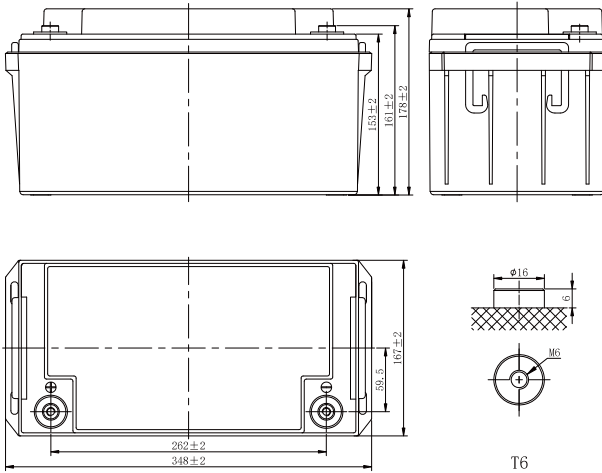

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Capacity (25°C)	C ₁₀ , 1.80V/cell	65Ah
Dimension	Length	348mm (13.7inches)
	Width	167mm (6.57inches)
	Container Height	178mm (7.01inches)
	Total Height	178mm (7.01inches)
Approx Weight	19.2kg (42.3lbs)	
Terminal	T6(M6)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	1495A	
Internal Resistance (25°C)	Approx 7 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-15~50°C (5~122°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.3C	
Charge voltage (25°C)	Standby Use	Cycle Use
	2.25-2.30V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-5mV/cell/°C
	40°C (104°F)	103%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
	≤3% per month at 25°C (77°F). batteries may be stored up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	
Self Discharge		


DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	135.3	101.0	84.1	70.7	54.3	40.5	34.2	25.7	20.6	15.5	12.4	10.3	8.96	7.29	6.09	3.27
1.80V/cell	157.7	119.1	97.8	81.4	61.4	45.3	37.9	28.1	22.4	16.8	13.3	11.1	9.61	7.80	6.50	3.45
1.75V/cell	172.1	127.7	103.5	85.5	64.2	47.2	39.3	29.0	23.1	17.2	13.7	11.4	9.82	7.94	6.60	3.49
1.70V/cell	186.4	136.2	109.4	89.9	67.0	49.0	40.7	30.0	23.8	17.7	14.0	11.6	10.0	8.08	6.70	3.53
1.67V/cell	194.6	141.2	112.8	92.5	68.7	50.1	41.6	30.6	24.2	18.0	14.2	11.8	10.2	8.17	6.76	3.56
1.60V/cell	214.5	152.8	120.9	98.5	72.6	52.7	43.6	31.9	25.2	18.7	14.7	12.1	10.4	8.36	6.91	3.62
Constant Power Discharge (Watts/cell) at 25°C (77°F)																
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	257.0	193.3	161.6	136.2	105.0	78.6	66.6	50.1	40.2	30.4	24.3	20.3	17.7	14.4	12.1	6.49
1.80V/cell	295.1	225.2	186.0	155.4	117.7	87.3	73.2	54.5	43.5	32.8	26.1	21.8	18.9	15.4	12.8	6.84
1.75V/cell	317.1	238.6	194.7	161.5	122.0	90.1	75.3	56.0	44.6	33.5	26.6	22.3	19.3	15.6	13.0	6.93
1.70V/cell	337.8	251.1	203.4	168.3	126.2	92.8	77.6	57.5	45.8	34.3	27.2	22.7	19.6	15.9	13.2	7.01
1.67V/cell	349.4	258.3	210.4	171.9	128.7	94.4	78.8	58.3	46.4	34.7	27.5	22.9	19.8	16.0	13.3	7.06
1.60V/cell	375.4	273.8	219.5	180.2	134.2	98.2	81.9	60.4	48.0	35.8	28.3	23.5	20.3	16.3	13.6	7.17




MPA12065.0 (12V65Ah)


Discharge Characteristics

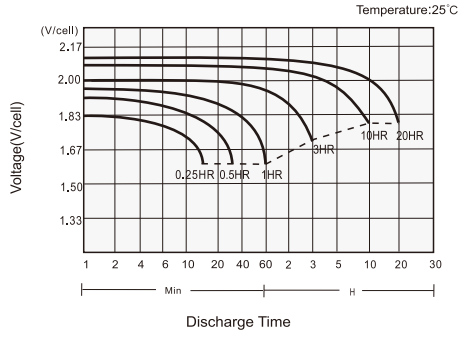

Charging Characteristics

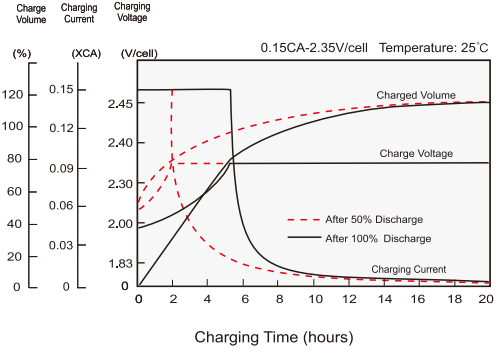

Effects of Temperature on Capacity

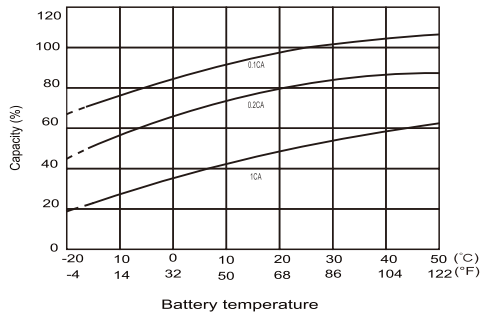

Self Discharge Characteristics

