



Applications

- > Electric vehicle
- > Electric wheelchair
- > Electric scooter
- > Electric play car for children
- > Garbage truck
- > Patrol car

General Features

- > High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- > High Energy Density and Power Density
- > Excellent Charge Acceptance Ability
- > Strong High and Low Temperature Performance
- > Optimized Capability of instant High-current Discharging
- > Low self-discharge rate

Specification

Nominal Voltage	6V
Nominal Capacity	230 Ah
Design life	5 years
Terminal	M8
Approx. Weight	Approx 35.0kg (77.2lbs)
Container Material	ABS

232Ah 10Hour Rate (23.2A to 5.25V)

Rated Capacity **200Ah** 3Hour Rate (66.7A to 5.25V)


158Ah 1Hour Rate (158A to 5.25V)

Operating Temperature	Discharge:	-20 ~50°C (-4 ~ 122°F)
	Charge:	-20 ~50°C (-4 ~ 122°F)
	Storage:	-20 ~50°C (-4 ~ 122°F)

Charge Method (25 °C)	Float Use:	6.85-6.95V@25°C
	Cycle Use:	7.35-7.45V,@25°C
	Max charge current	30.0A
Self discharge	3% of capacity declined per month at 25°C	



Dimension: 260(L)×180(W)×268(H)×273(TH) Unit: mm

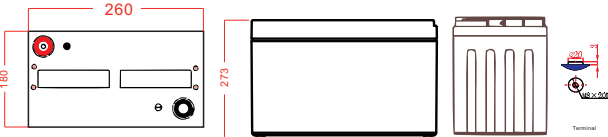

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)



F.V/Time	5Minin	15Minin	30Minin	1h	2h	3h	5h	8h	10h	20h
1.60V	851	457	278	163	93.2	69.1	45.4	29.1	23.9	12.6
1.65V	825	443	273	162	92.8	68.4	45.0	28.9	23.7	12.5
1.70V	792	434	269	160	92.1	67.4	44.5	28.6	23.5	12.4
1.75V	728	420	266	158	90.6	66.7	44.0	28.4	23.2	12.4
1.80V	653	391	255	154	89.0	66.2	42.8	28.2	23.0	12.3
1.85V	582	349	232	143	84.5	62.3	40.7	27.0	22.3	12.1

Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)

F.V/Time	5Minin	15Minin	30Minin	1h	2h	3h	5h	8h	10h	20h
1.60V	851	457	278	163	93.2	69.1	45.4	29.1	23.9	12.6
1.65V	825	443	273	162	92.8	68.4	45.0	28.9	23.7	12.5
1.70V	792	434	269	160	92.1	67.4	44.5	28.6	23.5	12.4
1.75V	728	420	266	158	90.6	66.7	44.0	28.4	23.2	12.4
1.80V	653	391	255	154	89.0	66.2	42.8	28.2	23.0	12.3
1.85V	582	349	232	143	84.5	62.3	40.7	27.0	22.3	12.1



Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.

Charging characteristic

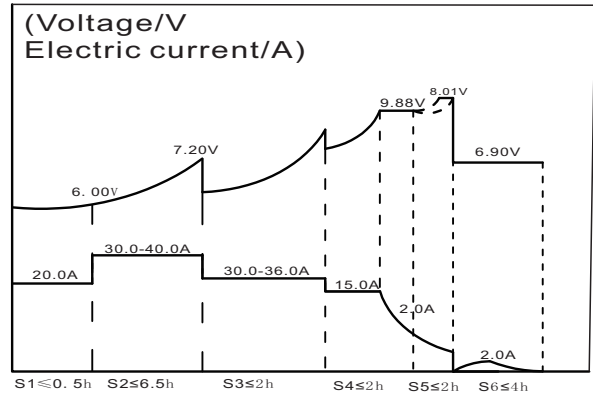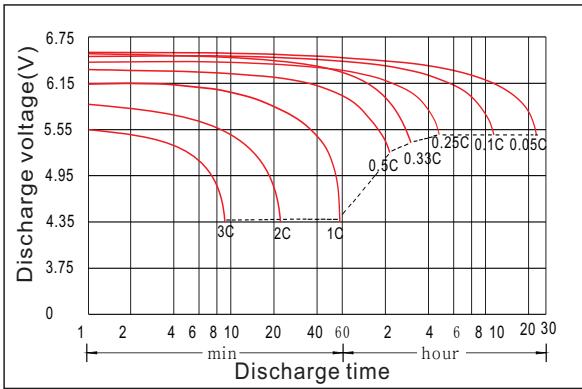

The effect of temperature on capacity

The effect of discharge depth on cycle life

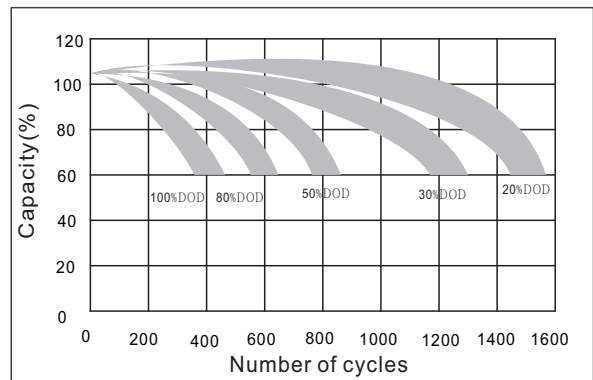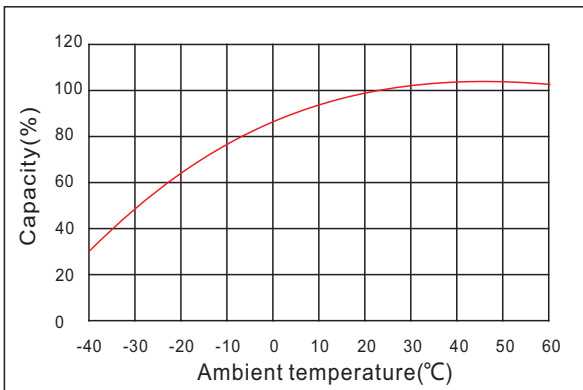

Curves of self-discharge

Curves of open circuit voltage vs. capacity

